


Vertical awning

Micro
860
1060

Just
enjoy life!

Lewens
MARKISEN

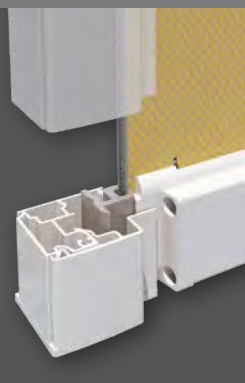



Made-to-measure comfort

- Width max. 400 cm, height max. 375 cm (depending on model, type and equipment)
- Electric motor (Fabric guide Zip: Electric motor with obstacle recognition)
- Covering, dependent on fabric guidance and model:
Glass fibre screen fabric (Micro 1060: Screen Sergé 1 % width max. 350 cm),
Soltis Perform 92 (Micro 860: Open guide only, Micro 1060: fabric guide Open or Cable only), acrylic (only Micro 1060, width max. 300 cm and height max. 300 cm)
- Options:
Radio motor/radio remote control, automatic weather sensor

The Micro 860/1060 Angular type offers the perfect complement to modern architecture and is the ideal solution for discreet installation flush with the façade in window openings.

Micro 860 and 1060 — Angular type and Rounded type

Vertical awnings for installation flush with the façade

Micro 860




Angular type

The clean lines of the square cassette cross section combine with modern façade design to create a harmonious impression. The cassette sits flush in the façade when installed in a window opening.

Micro 1060




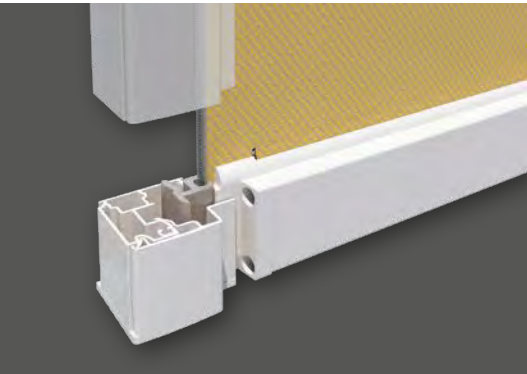

Micro 860 Z and 1060 Z

Fabric guide **ZIP**


Track with lateral zip guide:
For higher fabric tension,
greater wind safety and improved lateral
balancing of structural tolerances.

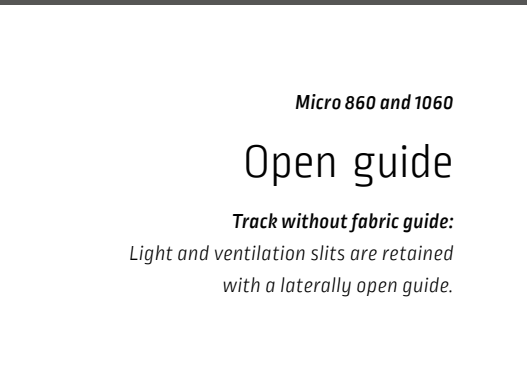

Micro 860 and 1060

Open guide


Track without fabric guide:
Light and ventilation slits are retained
with a laterally open guide.

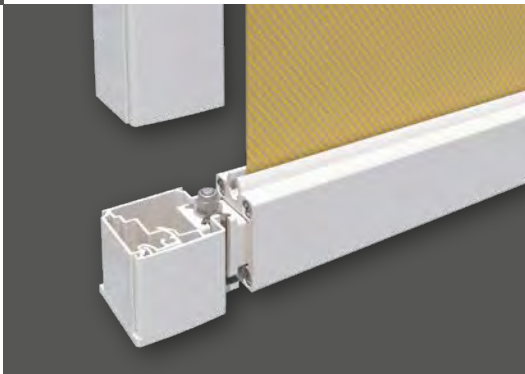

Only Micro 1060


Cable guide

The simple, open style of the Micro 1060
with lateral cable guide adds a visible design
feature to the façade.

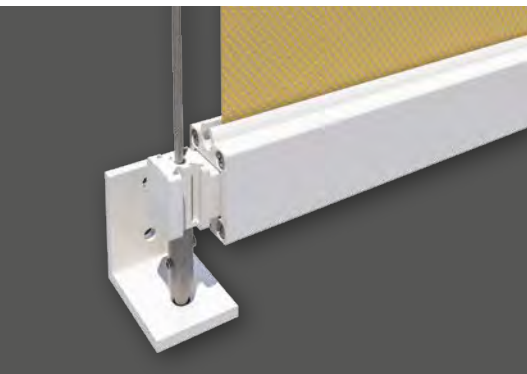

*III. above:
Micro 1060 Rounded type
with cable guide*


The Micro 860 and 1060 vertical awnings are especially suitable for unobtrusive installation flush with the façade on doors and windows, as well as on glass roof systems. An awning made from screen fabric or Soltis 92 provides optimal shade and privacy while affording views of the outside.

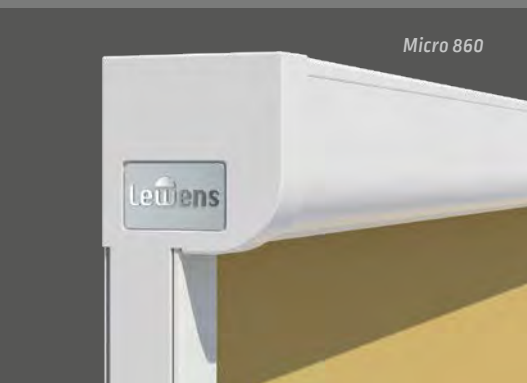

Micro 860

Rounded type

The softly rounded contour of the cassette
profile adds just the right touch to traditional
building designs. When installed in window
and door openings, the rounded shape
permits optimal light entry.

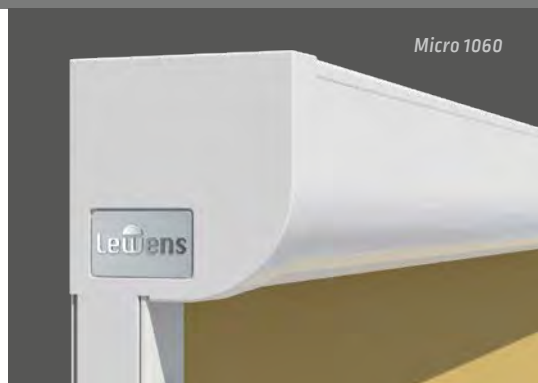

Micro 1060

Micro 860/1060

Equipment and technical features



Manufactured and assembled in Germany
Quality and technology CE-compliant



Micro 860



Micro 1060

Types	Angular / Rounded		Angular / Rounded	
	Open	ZIP	Open/Cable	ZIP
Fabric guide				
Cassette (H x D), approx.	85 x 85 mm	85 x 85 mm	105 x 105 mm	105 x 105 mm
Widths, 1 unit (max.)				
Motor drive	300 cm	275 cm	400 cm	400 cm
Crank drive	300 cm	200 cm	340 cm	200 cm
System heights (max.)				
Motor drive	210 cm	175 cm	375 / 300 cm	350 cm
Crank drive	200 cm	175 cm	200 cm	200 cm
Drive				
Electric motor (for wall switch)	■	-	■	-
- with obstacle recognition	-	■	-	■
Radio motor	□	□	□	□
Crank drive	□	□	□	□
Frame colours				
29 Lewens standard frame colours	■	■	■	■
Natural silver (E6/EV 1 anodized, small components RAL 9006)	■	■	■	■
Additional RAL, special colours and effect finishes	□	□	□	□
Awning fabrics from the LEWENS collection				
Screen	■	■	* ■	* ■
Soltis Perform 92	■	-	■	-
Branded acrylic (spun-dyed, ultra fade resistant)	-	-	** ■	** ■
Options				
Radio motor + radio remote control	□	-	□	-
- with obstacle recognition + radio remote control	-	□	-	□
Automatic weather sensor (sun, wind, rain)	□	□	□	□
Attachment				
Wall/niche	■	■	■	■
Elevated using mounting feet (8, 10, 13, 18)	□	□	□	□

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

■ Standard □ Option - not available

* Screen **Sergé 1%** width max. 350 cm

** width max. 300 cm x height max. 300 cm



Your stockist will be happy to advise you:



www.lewens-markisen.de

Subject to technical alterations. Date: 08/2024